




1/22

FIG. 1

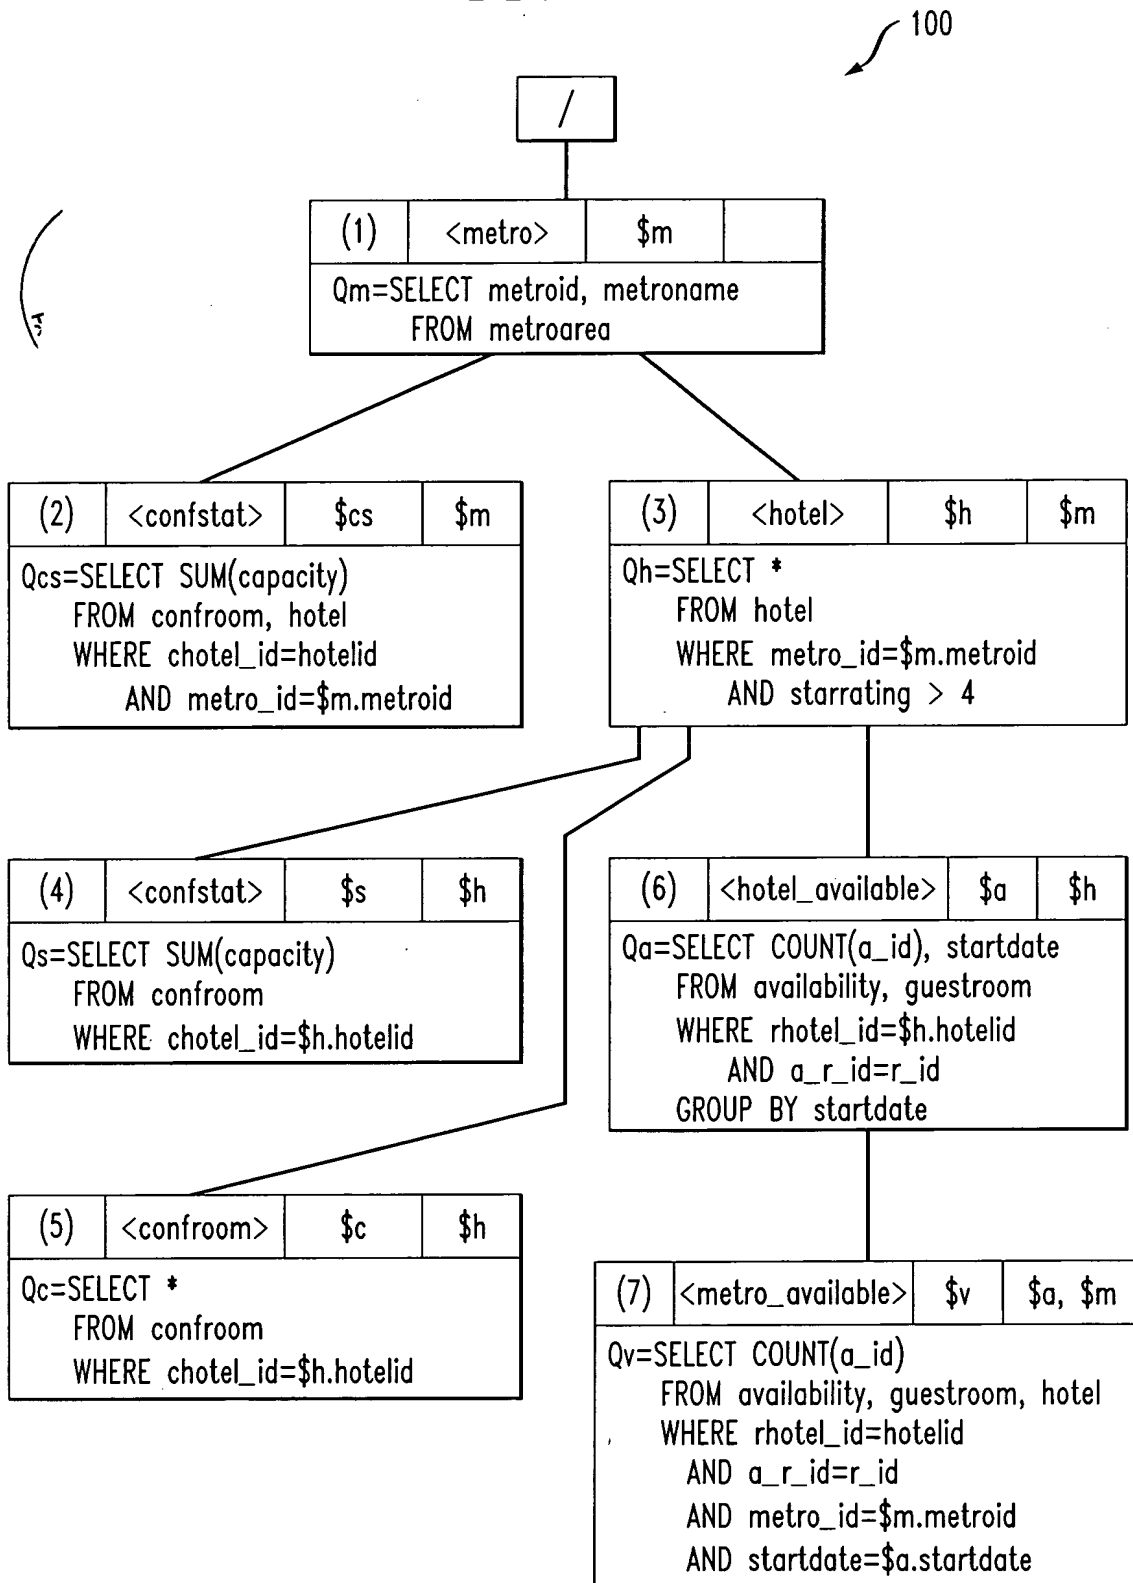

2/22

FIG. 2

200

```
hotelchain(chainid, companyname,hqstate)
metroarea(metroid, metroname)
hotel(hotelid, hotelname, starrating, chain id
      metro id, state id, city, pool, gym)
guestroom(r id, rhotel id, roomnumber, type, rackrate)
confroom(c id, chotel id, croomnumber, capacity, rackrate)
availability(a id, a r id, startdate, enddate, price)
```

FIG. 3

300

```
<metro name="NYCMetroNJ">
  <hotel name="Hyton" pool="Y" gym="N">
    <confstat capacity="3200"/>
    <confroom name="Green Flamingo" capacity="240"/> ...
  ...
</hotel>
<hotel> ... </hotel> ...
</metro>
```

FIG. 4

400

```
<xsl:template match="pattern" mode="integer">
  <Result>
    <xsl:apply-templates select="expression"/>
  </Result>
</xsl:template>
```

3/22

FIG. 5

```
<xsl:template match="/">                                     (R1)
  <HTML>
    <HEAD></HEAD>
    <BODY>
      <xsl:apply-templates select="metro"/>
    </BODY>
  </HTML>
</xsl:template>
<xsl:template match="metro">                                   (R2)
  <result_metro>
    <A></A>
    <xsl:apply-templates
      select="hotel/confstat"/>
  </result_metro>
</xsl:template>
<xsl:template match="confstat">                                 (R3)
  <result_confstat>
    <B></B>
    <xsl:apply-templates
      select="../hotel_available/../confroom"/>
  </result_confstat>
</xsl:template>
<xsl:template match="metro/hotel/confroom">                   (R4)
  <xsl:value-of select="."/>
</xsl:template>
```

FIG. 6

4/22


600

```

Function PROCESS(x, dcon, mode)
Input: XSLT stylesheet as x, Context document node as dcon,
        Desired mode of the matched rule as mode
Output: XML document fragment as result
1: result  $\leftarrow$  empty
2: for  $r_i \in x$  in decreasing order of priority( $r_i$ ) do
3:   if mode( $r_i$ ) = mode and MATCH(dcon,  $r_i$ ) then
4:     result  $\leftarrow$  output ( $r_i$ )
5:     for  $a_j \in \text{apply}(r_i)$  do
6:       Dnew_con  $\leftarrow$  SELECT(dcon,  $a_j$ )
7:       sub_result  $\leftarrow$  empty
8:       for  $d_{new\_con} \in D_{new\_con}$  do
9:         sub_result  $\leftarrow$  concatenate(sub_result,
                                     PROCESS(x, dnew_con, mode( $a_j$ )))
10:      Replace  $a_j$  in result with sub_result
11: return result


```

FIG. 7

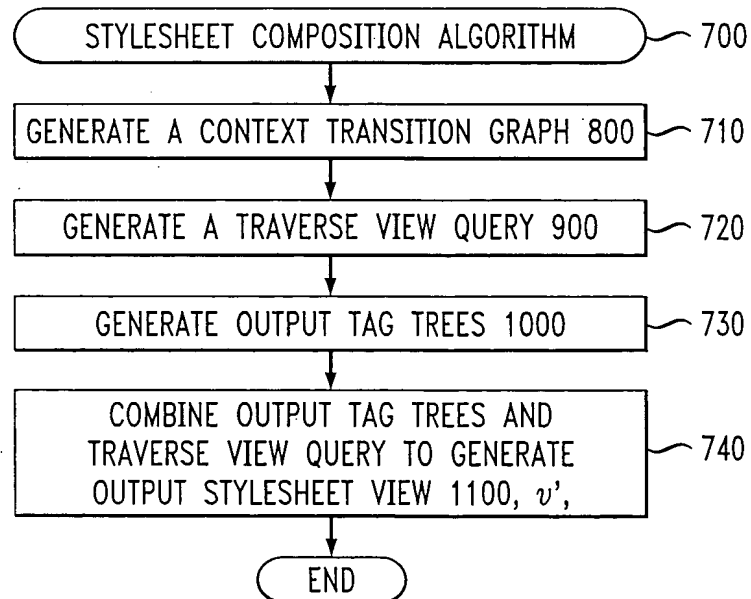

5/22

FIG. 8

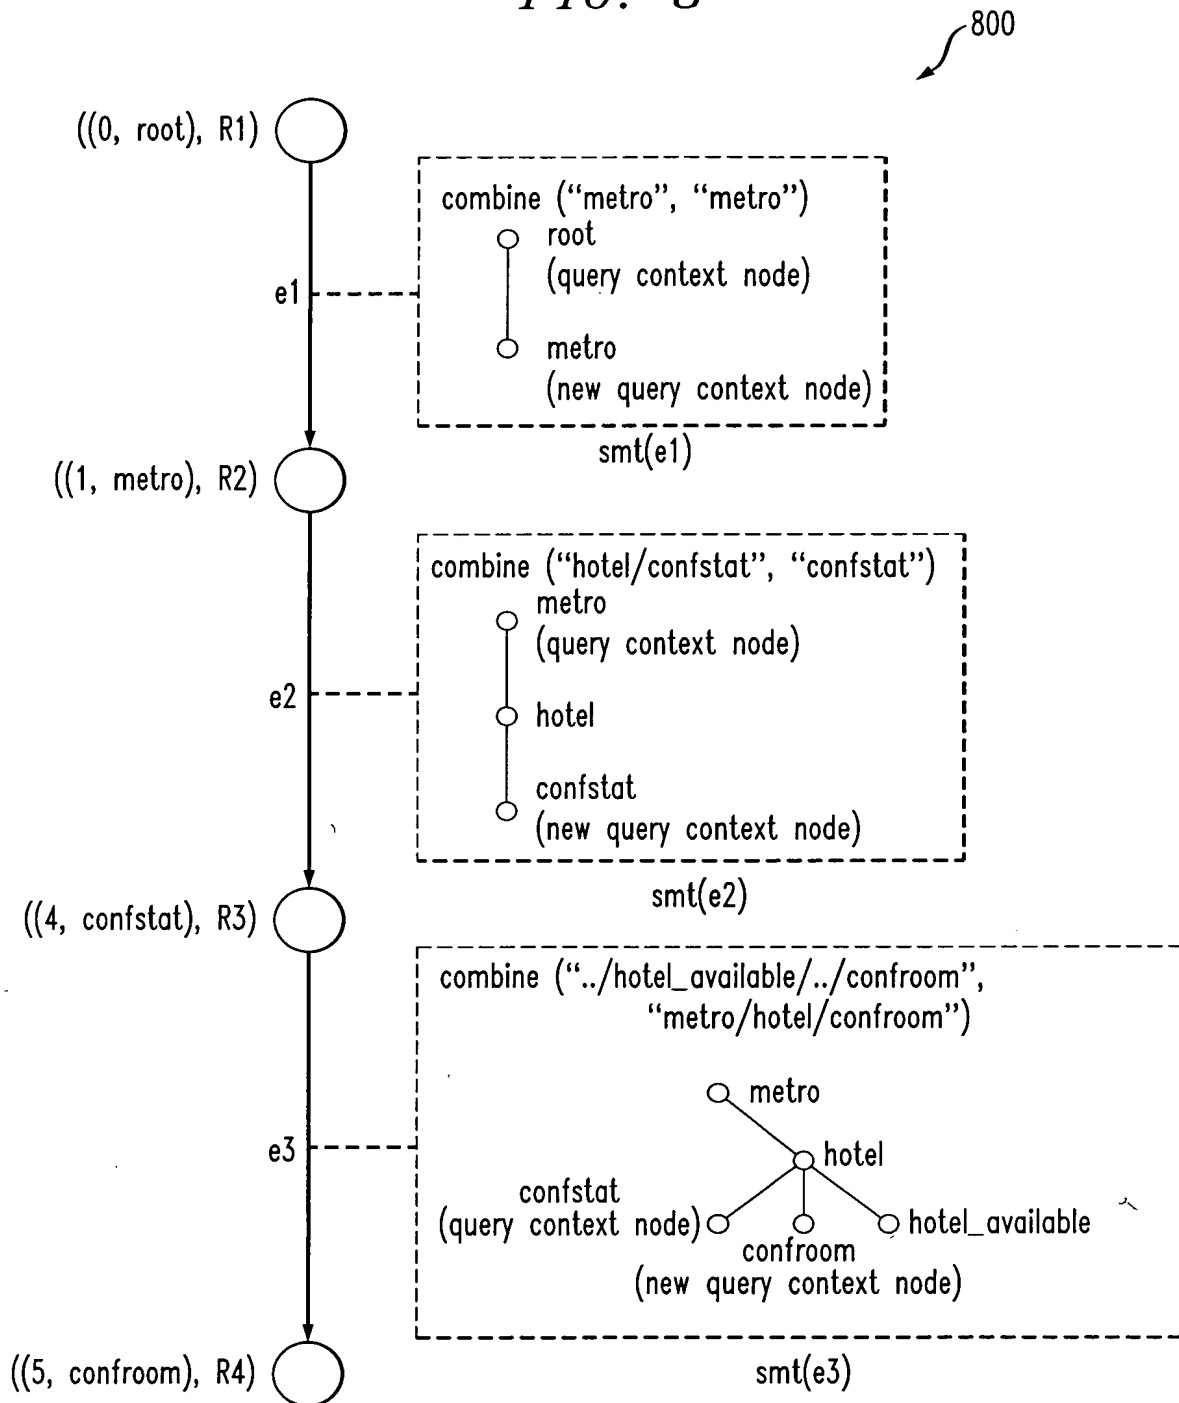


6/22

FIG. 9

(a) TRAVERSE VIEW QUERY

900

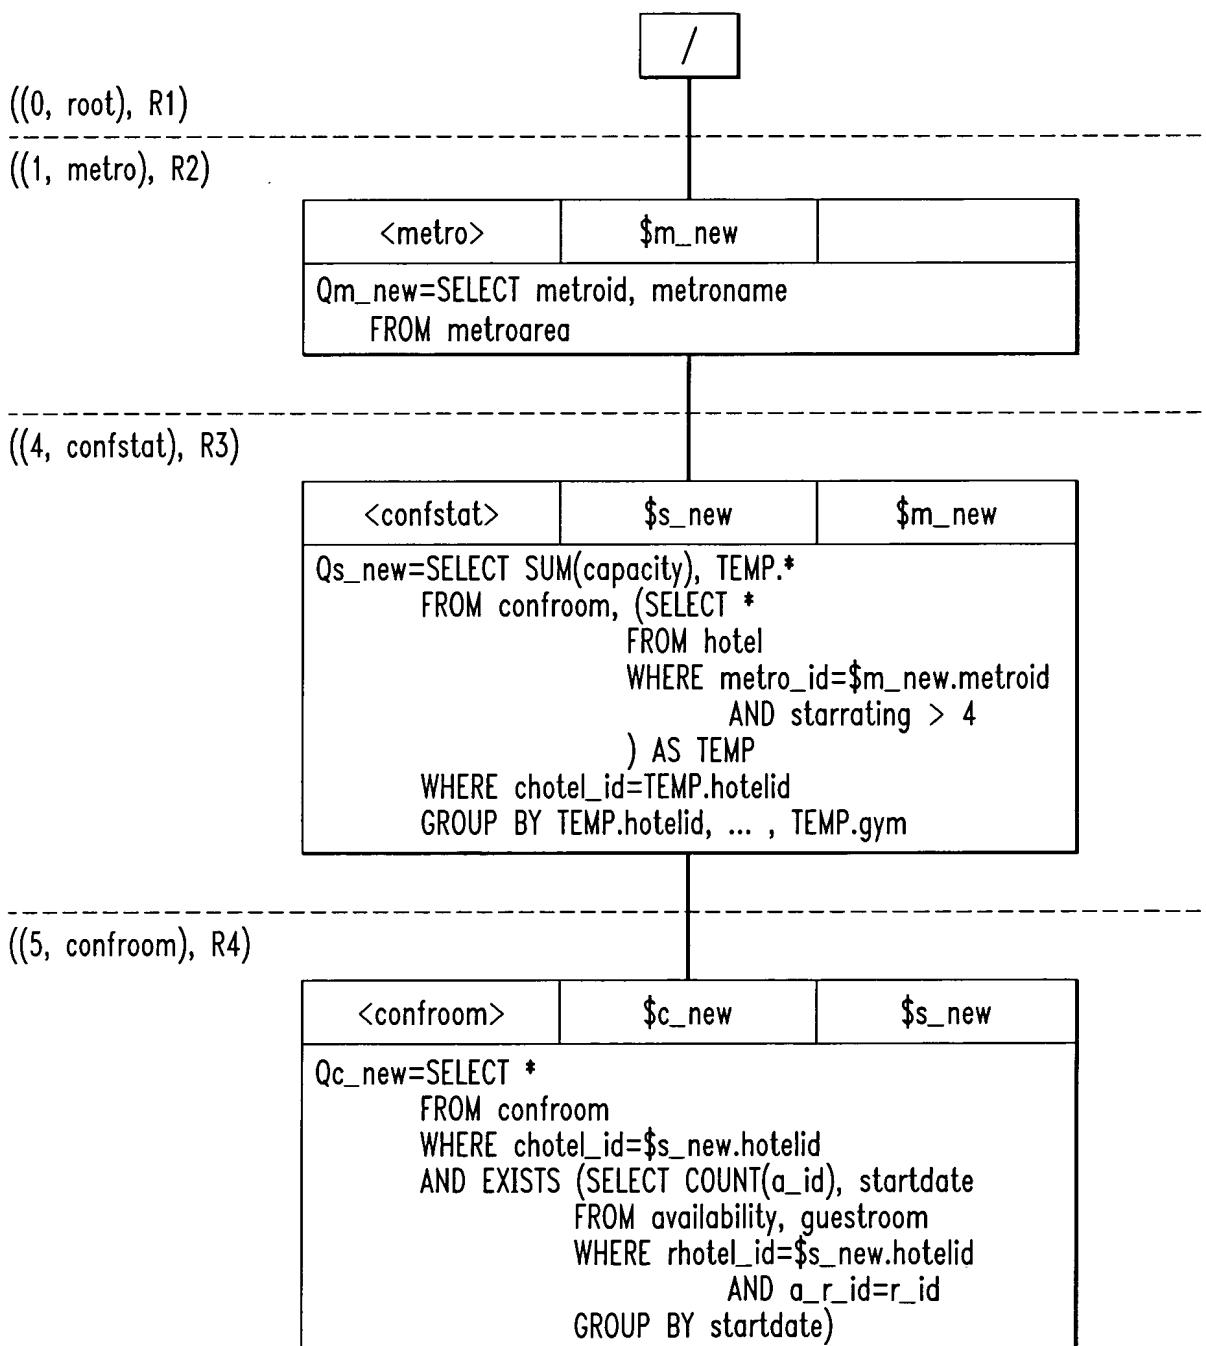


7/22

FIG. 10

(b) OUTPUT TAG TREE

1000

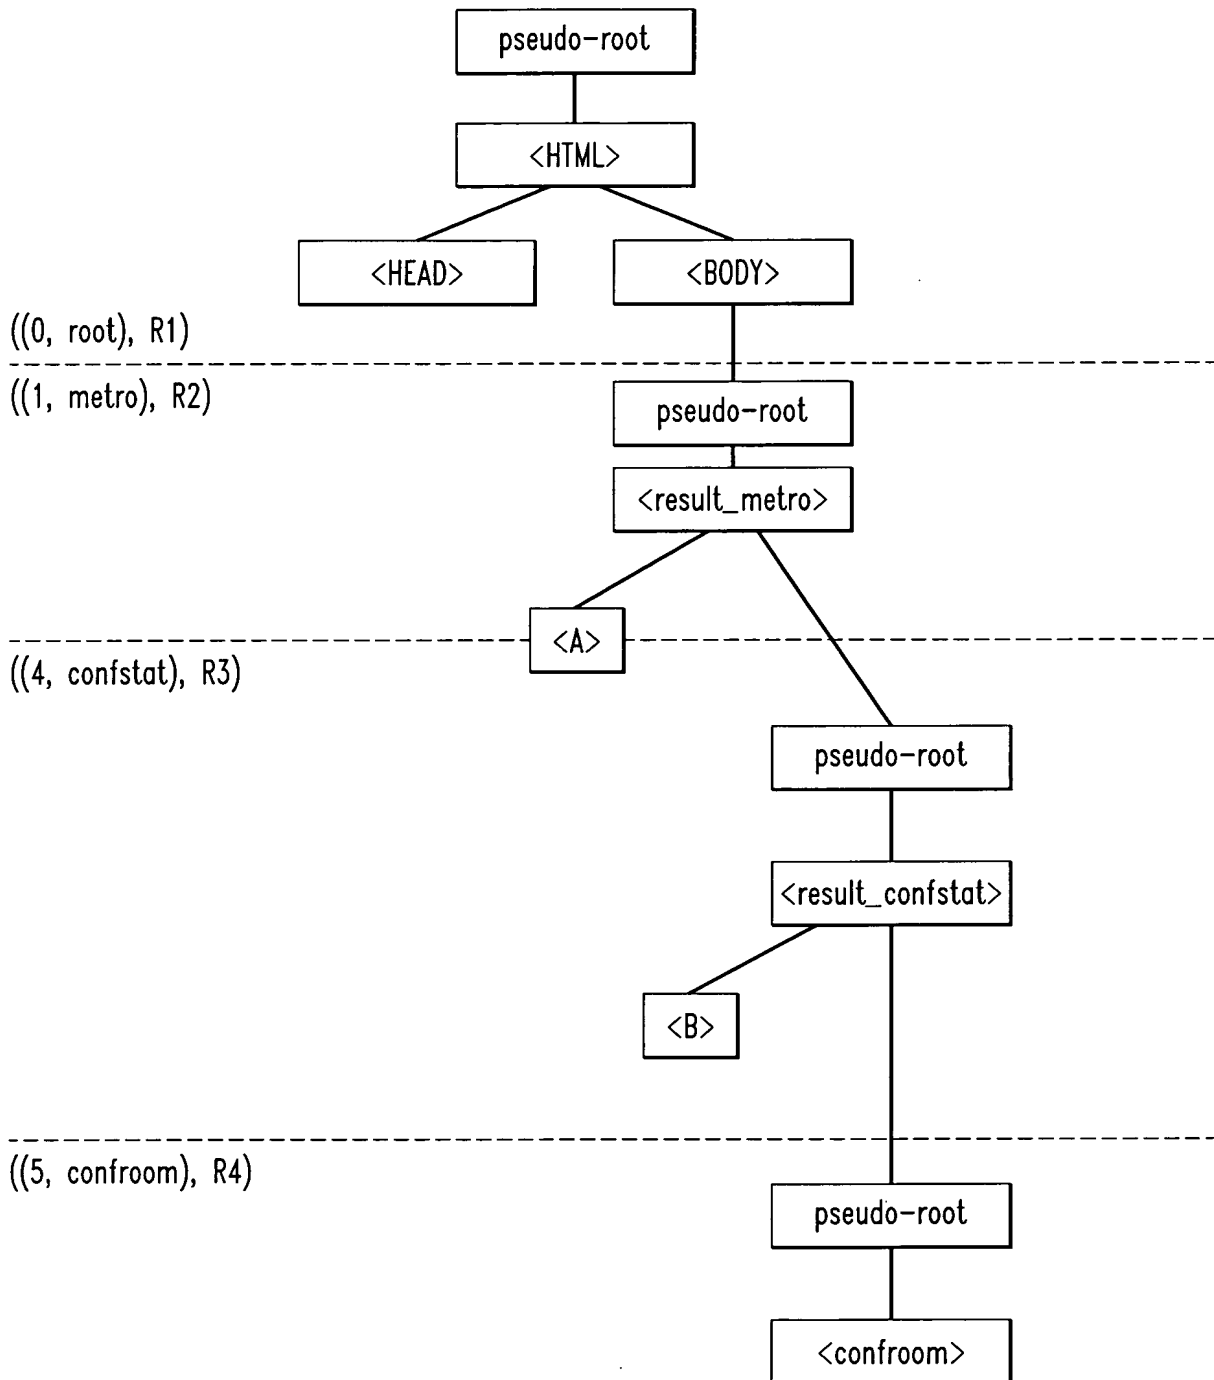


8/22

FIG. 11


(c) STYLESHEET VIEW

1100

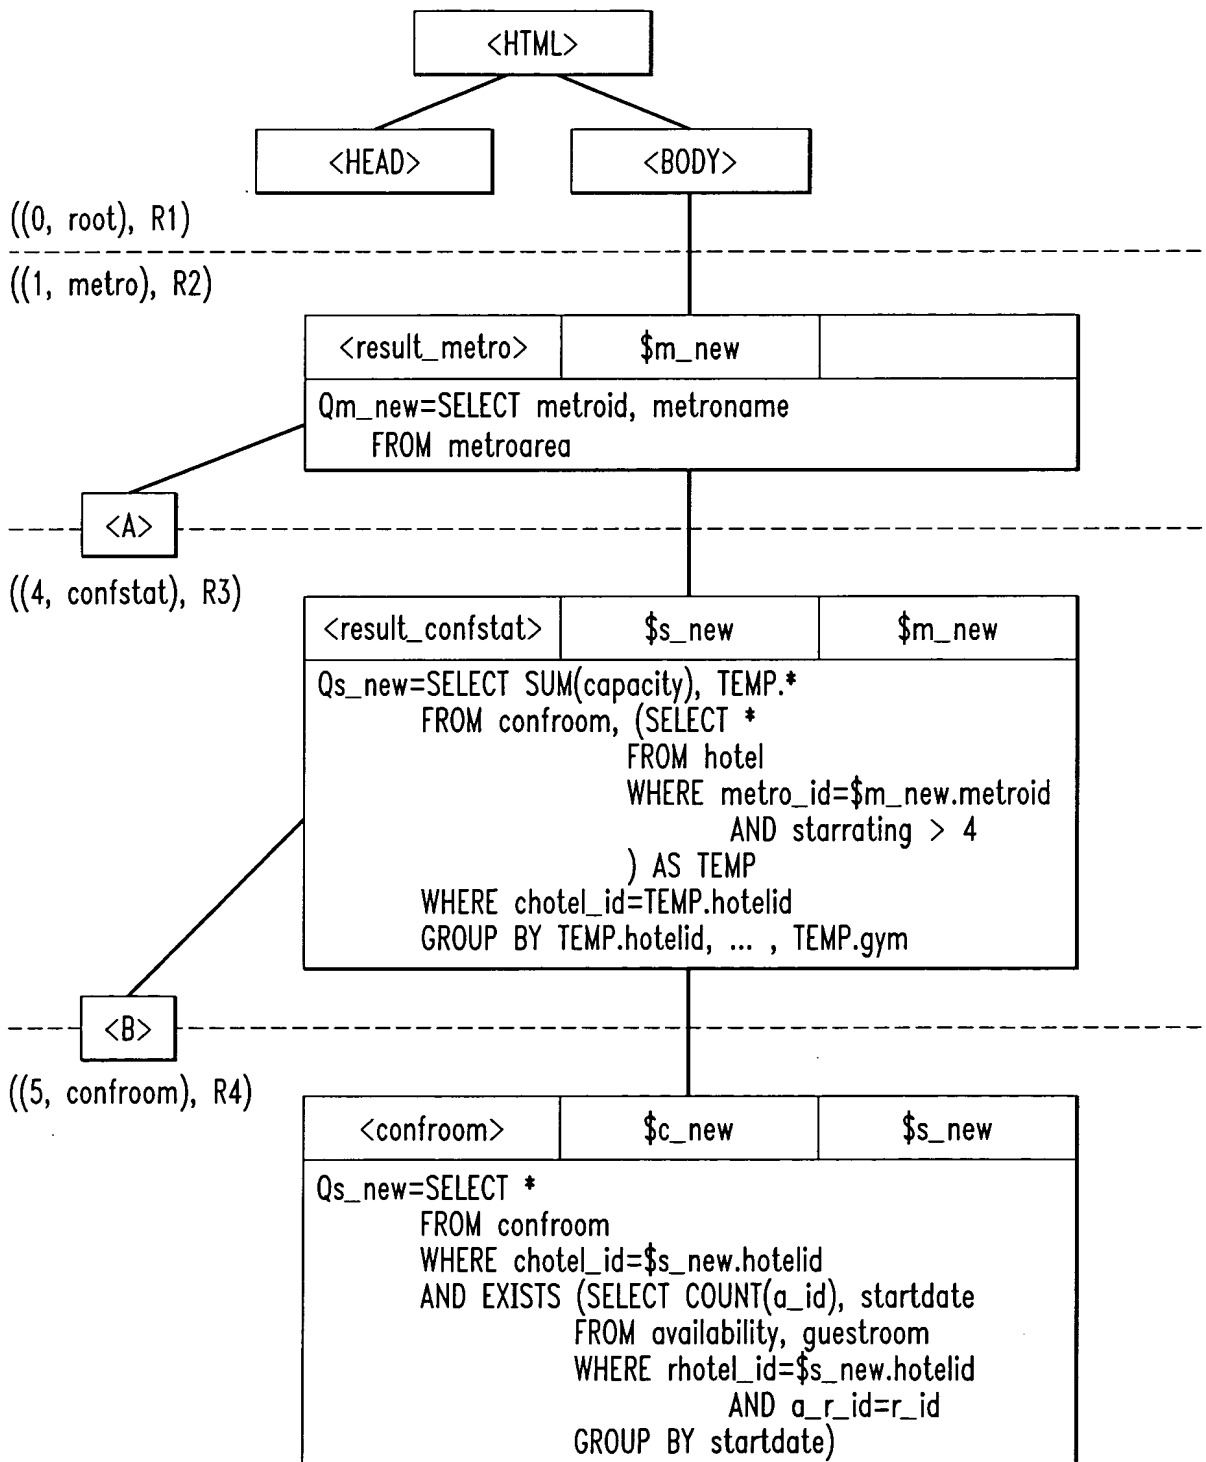

9/22

FIG. 12

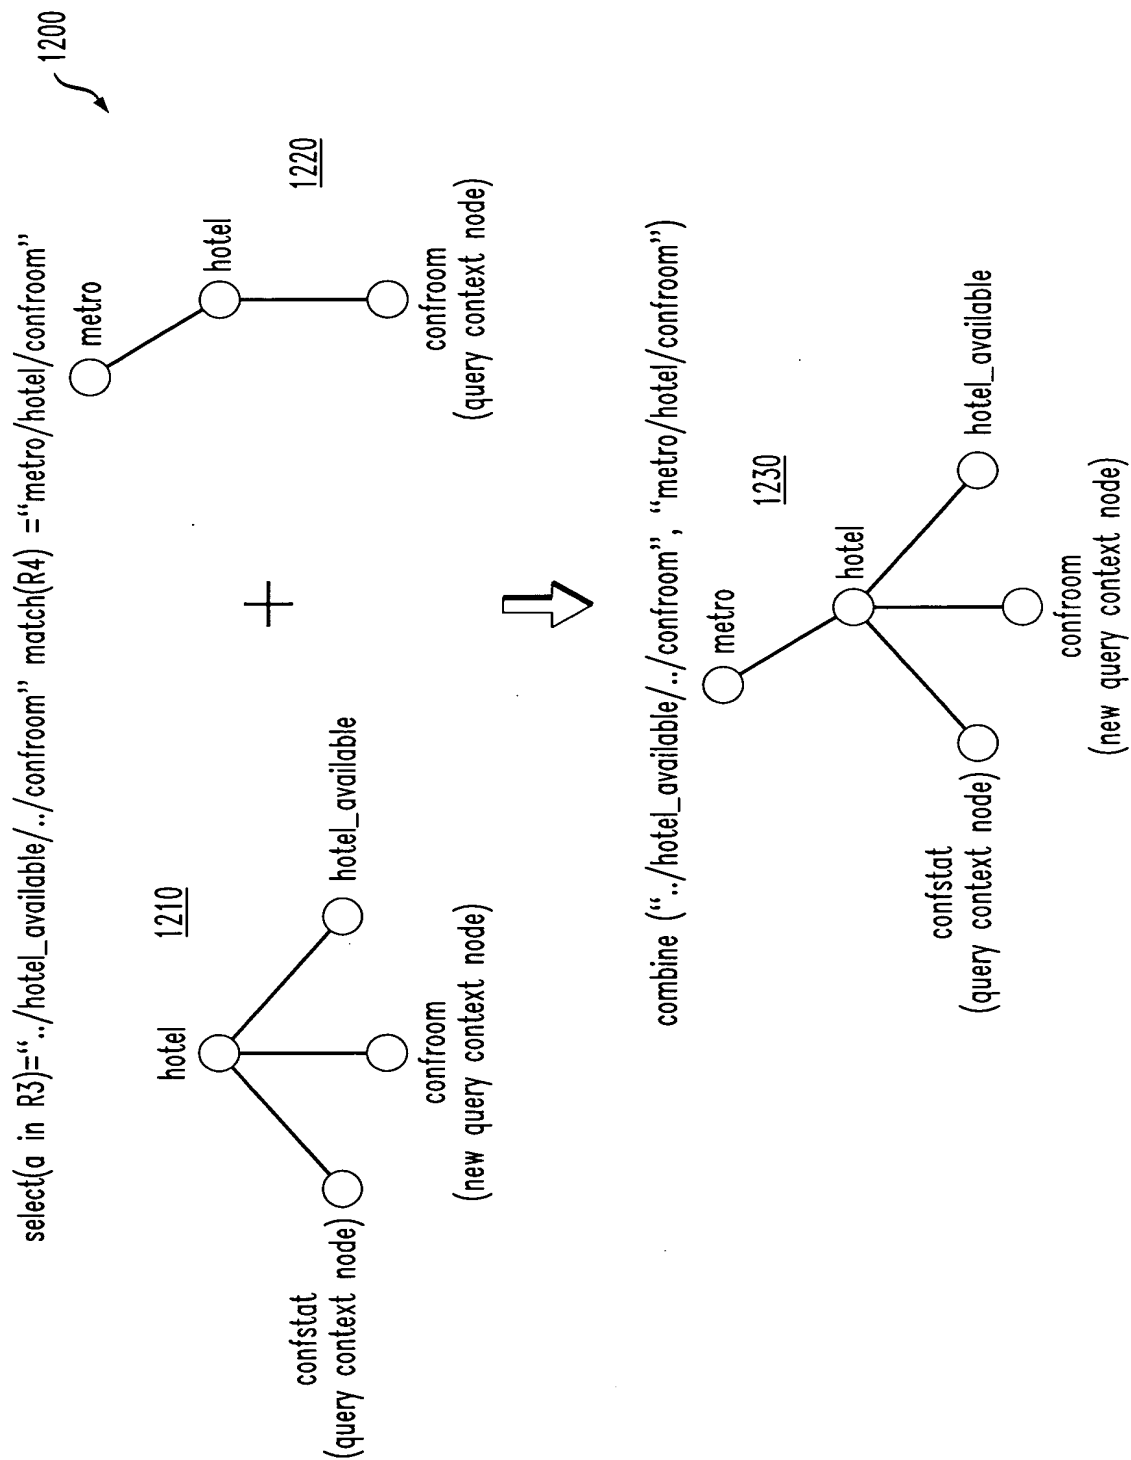

10/22

FIG. 13

1300

Procedure *Compose*(v, x)

Input: v : original schema-tree view query; x : XSLT stylesheet

Output: stylesheet view

1: ctg : a Context Transition Graph

2: tvq : a Traverse View Query

3: $ottree$: an Output Template Tree

4: **for** $n \in v$ **do**

5: **for** $r \in x$ **do**

6: **if** $MATCHQ(n, r) \neq \text{NULL}$ **then**

7: add (n, r) to ctg

8: **for** $(n_1, r_1) \in ctg$ **do**

9: **for** $(n_2, r_2) \in ctg$ **do**

10: **for** $a \in \text{apply}(r_1)$ **do**

11: $t \leftarrow SELECTQ(n_1, a, n_2)$, $p \leftarrow MATCHQ(n_2, r_2)$

12: **if** $t \neq \text{NULL}$ **and** $\text{mode}(a) = \text{mode}(r_2)$ **then**

13: add an edge $e = ((n_1, r_1), (n_2, r_2), a)$ to ctg

14: $\text{smt}(e) \leftarrow \text{COMBINE}(t, p)$

15: (repeatedly) Delete all nodes without incoming edge, except (root, r)

16: $tvq \leftarrow ctg \setminus \{(\text{copy})\}$, $\text{bvmap}(\text{root of } tvq) \leftarrow \text{empty}$

17: (repeatedly) Duplicate nodes with multiple incoming edges, splitting incoming edges and copying outgoing edges

18: replace binding variables in tvq with new, unique binding variables

19: **for** $e = (w_1 = (n_1, r_1), w_2 = (n_2, r_2), a)$ in edges of ctg **do**

20: $(Q_{bv(w_2)}, \text{bvmap}(w_2)) \leftarrow$

$\text{UNBIND}(\text{smt}(e), n_1, n_2, bv(w_2), \text{bvmap}(w_1))$

21: **for all** binding variables bv referenced in $Q_{bv(w_2)}$ **do**

22: rename bv as $\text{bvmap}(w_2).get(bv)$

11/22

FIG. 13 cont.

```
23: for  $w = (n, r) \in tvq$  do
24:    $ott(w) = GENERATE\_OTT(n, r)$ 
25:  $ottree \leftarrow ott(w) \forall w \in tvq$  {initially a forest}
26: for  $e = (w_1, w_2, a)$  in edges of  $tvq$  do
27:    $a' \leftarrow$  the "apply-template" node in  $ott(w_1)$  which is a copy of  $a$ 
28:   replace  $a'$  with an edge from  $parent(a')$  to  $root(ott(w_2))$ 
29: for  $w = (n, r) \in tvq$  do
30:    $bv(root(ott(w))) \leftarrow bv(w)$ 
31:    $Q_{bv(root(ott(w)))} \leftarrow Q_{bv(w)}$ 
32: Remove the topmost "pseudo-root" node in  $ottree$ 
33: while there is any "pseudo-root" node  $pr$  left do
34:   for each child node  $c$  of  $pr$  do
35:     add edge  $e = (parent(pr), c)$ 
36:     if  $Q_{bv(c)}$  is empty then
37:        $bv(c) \leftarrow bv(pr)$ ,  $Q_{bv(c)} \leftarrow Q_{bv(pr)}$ 
38:     else
39:        $Q_{bv(c)} \leftarrow UNBIND(parent(pr), c)$ 
40:       add the SELECT columns of  $Q_{bv(pr)}$  to  $Q_{bv(c)}$ 
41:       change " $bv(pr)$ " as " $bv(c)$ " in the tag queries of  $c$ 's
         descendents
42:   remove edge  $e = (parent(pr), pr)$  and node  $pr$ 
43: return  $ottree$  {new stylesheet view}
```

12/22

FIG. 14

1400

Function *UNBIND*(*m*, *n*)

Input: Query context node as *m*, Target node to unbind as *n*

Output: Unbound query for *n* as *q*

- 1: $n_j \leftarrow$ the lowest common ancestor of *m* and *n*
- 2: $s_j \leftarrow bv(n_j)$
- 3: $child_n(n_j) \leftarrow$ child node of n_j along the path from n_j to *n*
- 4: $s_{j-1} \leftarrow bv(child_n(n_j))$
- 5: $q \leftarrow Q_{bv(n)}^{s_1, s_2, \dots, s_{j-1}}(s_j, \dots, s'_k)$, which is the unbound tag query of *n*, $Q_{bv(n)}(s_1, s_2, \dots, s_k)$
- 6: **return** *q*

FIG. 15

Function *NEST*(*p*, *p'*)

Input: Node as *p*, Child node as *p'*

Output: Tag query for *p* after nesting as *q*

- 1: $q \leftarrow Q_{bv(p)}$
- 2: **for** each child node *c* of *p*, except *p'* **do**
- 3: $q_c \leftarrow NEST(c, NULL)$
- 4: add *EXISTS* q_c in *WHERE* clause of *q*
- 5: **return** *q*

FIG. 16

- 1: {**Replace line 5 of Figure 10**}
- 2: $P \leftarrow$ {nodes along the path from $child_n(n_j)$ to *n*}
- 3: **for** node *p* $\in P$ **do**
- 4: $p' \leftarrow$ child of *p* $\in P$, otherwise *NULL*
- 5: $\Theta_{bv(p)} \leftarrow NEST(p, p')$
- 6: $q \leftarrow \Theta_{bv(n)}^{s_1, s_2, \dots, s_{j-1}}(s_j, \dots, s'_k)$, which is the unbound and nested tag query of *n*, $\Theta_{bv(n)}(s_1, s_2, \dots, s_k)$, and decorrelation of $bv(s_i)$ is done by Θ_{s_i} .

13/22

FIG. 17

Function *UNBIND*(*smt*, *m*, *n*, *bv'*, *bvmap*)


Input: Select-match subtree **as** *smt*, Query context node of *smt* **as** *m*, New query context node of *smt* **as** *n*, New binding variable **as** *bv'*, Binding variable map **as** *bvmap*.

Output: Unbound query for *smt* **as** *q*, New binding variable map **as** *bvmap'*.

```
1: q ← UNBIND(m, n)
2: nj ← the lowest common ancestor of m and n
3: childn (nj) ← child node of nj along the path from nj to n
4: R ← {nodes along the path from childn (nj) to n}
5: for node p ∈ R do
6:   add the SELECT columns of Qbv(p) to q
7: P ← {nodes along the path from root of smt to m}
8: for node p ∈ P do
9:   for each child node c of p, such that c ∉ P and c ∉ R do
10:    qc ← NEST(c, NULL)
11:    add EXISTS qc in WHERE clause of q
12: bvmap' ← bvmap
13: for node p ∈ R do
14:   bvmap'.insert(bv(p), bv')
15: childm (nj) ← child node of nj along the path from nj to m
16: S ← {nodes along the path from childm (nj) to m}
17: for node s ∈ S do
18:   bvmap'.remove(bv(s))
19: return (q, bvmap')
```

14/22

FIG. 18

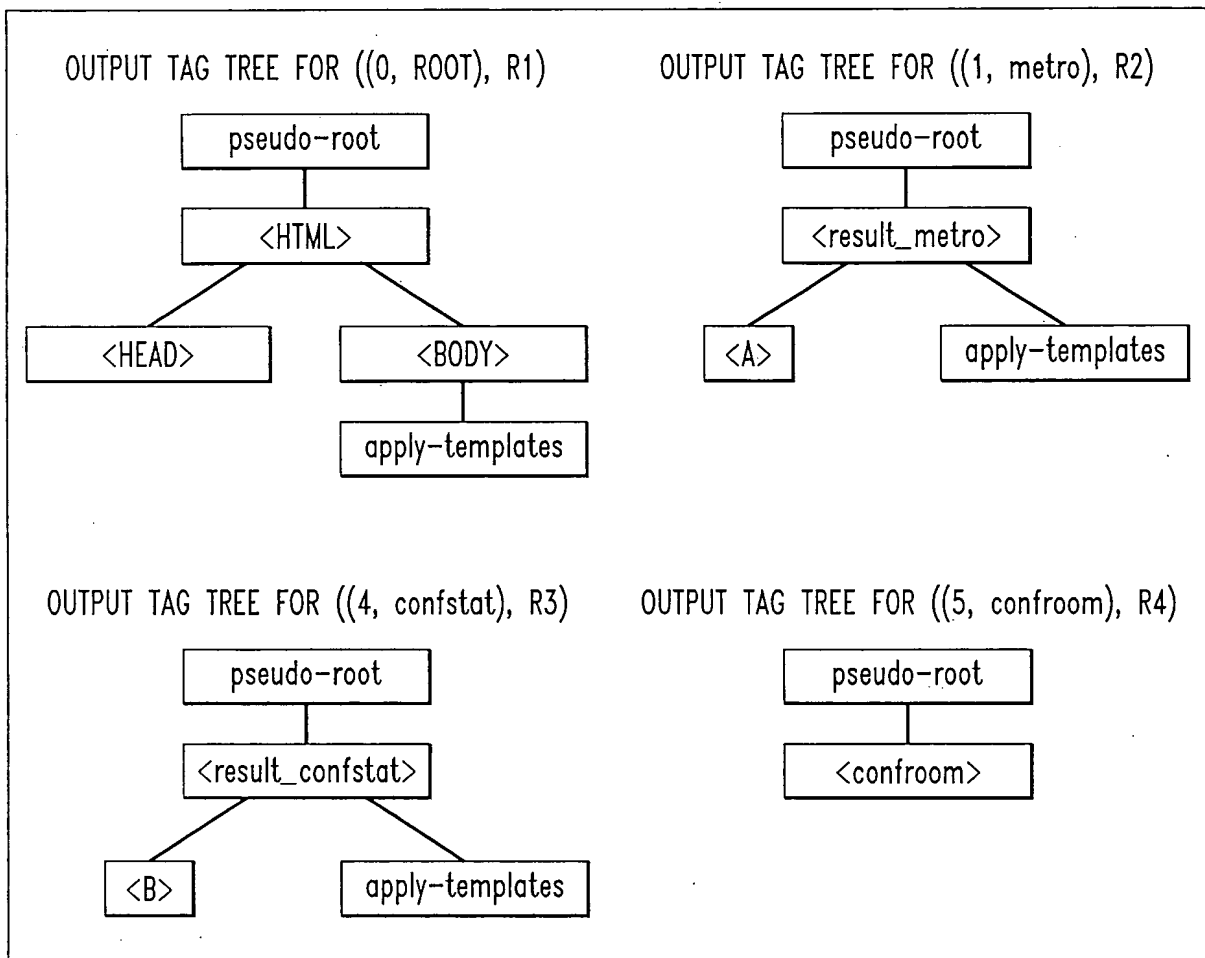

15/22


FIG. 19

(R1), (R3), and (R4) are the same as Figure 4.

```
<xsl:template match="metro">
  <xsl:apply-templates select="hotel/confstat"/>
</xsl:template>
```

(R2)

FIG. 20

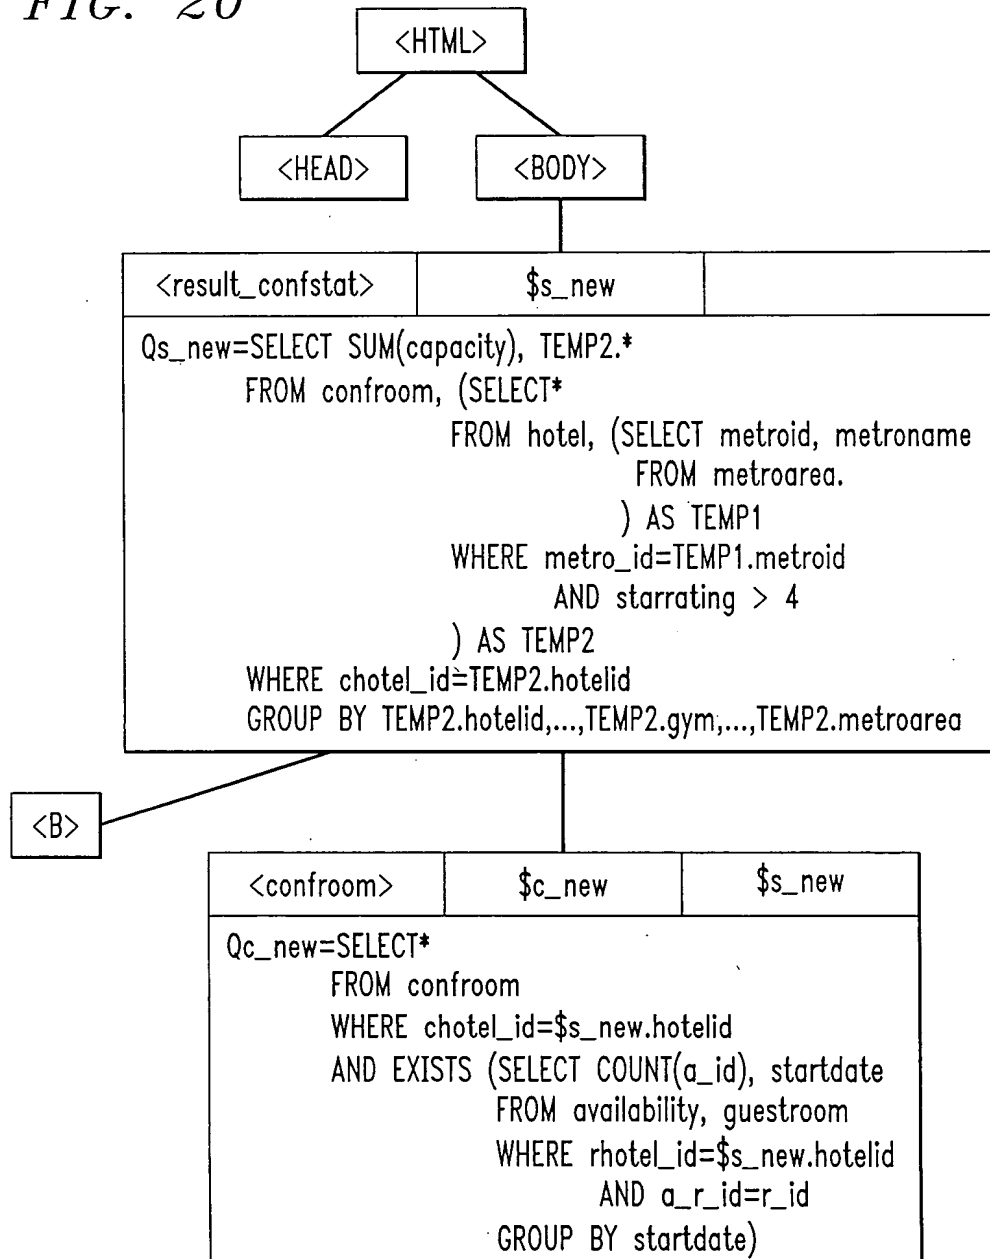

16/22


FIG. 21

(R1) and (R2) are the same as Figure 4.

```
<xsl:template match="confstat">                                (R3)
  <result_confstat>
    <B/>
    <xsl:apply-templates select=".[@sum<200]/
      ../hotel_available/../confroom
      [../confstat[@sum>100]] [@capacity>250]"/>
  </result_confstat>
</xsl:template>
```

```
<xsl:template match="metro[@metroname=
  "chicago"]/hotel/confroom">                                (R4)
  <xsl:value-of select="."/>
</xsl:template>
```

FIG. 22

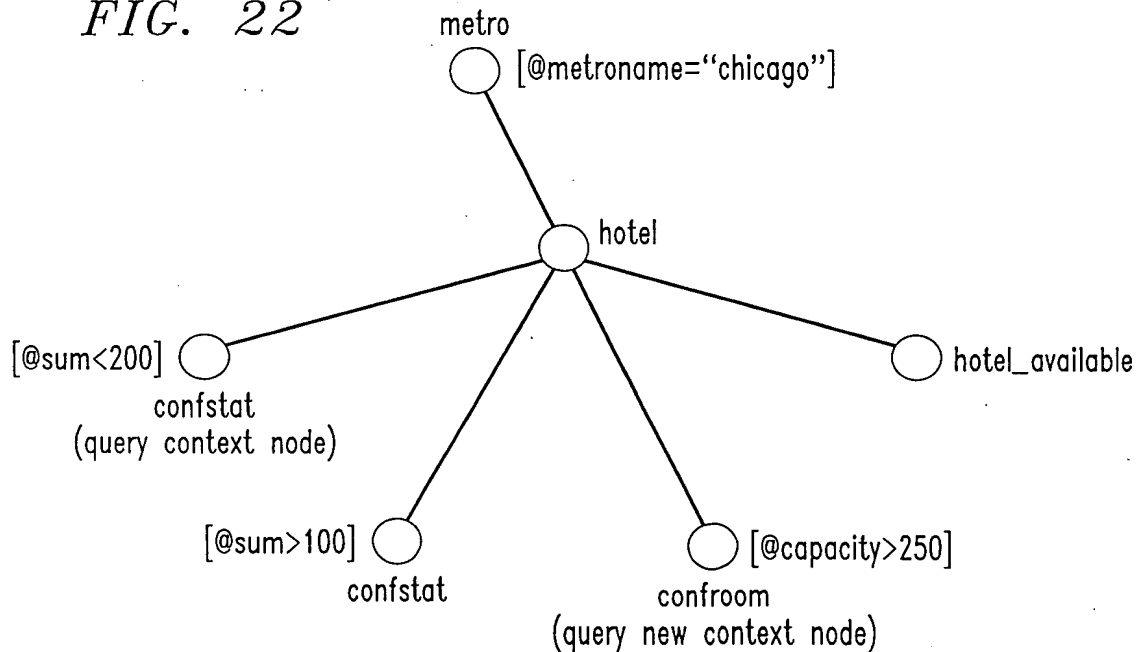

REPLACEMENT SHEET

17/22

FIG. 23

{Insert the following

(a) after line 8 of Figure 13

(b) after line 1 of Figure 11}

$e_p \leftarrow$ predicate using $tag(p)$

add e_p in *WHERE* clause of q

FIG. 24

```
SELECT * FROM confroom
WHERE chotel_id=$s_new.hotelid
  AND capacity > 250
  AND $s_new.SUM_capacity<200
  AND $s_new.metroname="chicago"
  AND EXISTS (SELECT SUM (capacity)
              FROM confroom,
              WHERE chotel_id=$s_new.hotelid
              HAVING SUM (capacity) > 100)
  AND EXISTS (SELECT COUNT (a_id), startdate
              FROM availability, guestroom
              WHERE rhotel_id=$s_new.hotelid
              AND a_r_id=r_id
              GROUP BY startdate)
```

18/22

FIG. 25

(a)

```
<xsl:template match="pattern" mode="m">
  <xsl:if test="expression">
    template body
  </xsl:if>
</xsl:template>
```

(b)

```
<xsl:template match="pattern" mode="m">
  <xsl:apply-templates select=" . [expression] " mode="mnew"/>
</xsl:template>

<xsl:template match="nodename" mode="mnew">
  template body
</xsl:template>
```

FIG. 26

(a)

```
<xsl:template match="pattern" mode="m">
  <xsl:choose>
    <xsl:when test="e1">b1</xsl:when>
    <xsl:when test="e2">b2</xsl:when>
    <xsl:otherwise>b3</xsl:otherwise>
  </xsl:choose>
</xsl:template>
```

(b)

```
<xsl:template match="pattern" mode="m">
  <xsl:apply-templates
    select=" . [e1] " mode="mnew1"/>
  <xsl:apply-templates
    select=" . [not (e1) and e2] "
    mode="mnew2"/>
  <xsl:apply-templates
    select=" . [not (e1) and not (e2)] "
    mode="mnew3"/>
</xsl:template>

<xsl:template match="nodename"
  mode="mnew1">b1</xsl:template>
<xsl:template match="nodename"
  mode="mnew2">b2</xsl:template>
<xsl:template match="nodename"
  mode="mnew3">b3</xsl:template>
```

REPLACEMENT SHEET

19/22

FIG. 27

(a)

```
<xsl:template match="pattern" mode="m">
  <xsl:value-of select="expression"/>
</xsl:template>
```

(b)

```
<xsl:template match="pattern" mode="m">
  <xsl:apply-templates
    select="path expression" mode="mnew"/>
</xsl:template>

<xsl:template match="nodename[predicate]"
  mode="mnew">
  <xsl:value-of select=" . " />
</xsl:template>
```

FIG. 28

(a)

```
<xsl:template match="pattern 1" mode="m">
  template body 1
</xsl:template>

<xsl:template match="pattern 2" mode="m">
  template body 2
</xsl:template>
```

(b)

```
<xsl:template match="pattern 1" mode="m1">
  template body 1
</xsl:template>

<xsl:template match="pattern 2" mode="m">
  <xsl:choose>
    <xsl:when test="expression 1">
      <xsl:apply-templates select=" . "
        mode="m1"/>
    </xsl:when>
    <xsl:otherwise>
      template body 2
    </xsl:otherwise>
  </xsl:choose>
</xsl:template>
```

REPLACEMENT SHEET

20/22

FIG. 29

```
<xsl:template match="/metro"> (R1)
  <xsl:param name="idx" select="10"/>
  <result_metro>
    <xsl:apply-templates
      select="hotel/hotel_available[@count>10]
        /metro_available[@count<$idx] ">
    <xsl:with-param name="idx"
      select="$idx"/>
    </xsl:apply-templates>
  </result_metro>
</xsl:template>

<xsl:template match="metro_available"> (R2)
  <xsl:param name="idx"/>
  <xsl:choose>
    <xsl:when test="idx<=1">
      <xsl:value-of select=".""/>
    </xsl:when>
    <xsl:otherwise>
      <result_metroavail>
        <xsl:apply-templates
          select="self::[@count>50]/../../">
        <xsl:with-param name="idx"
          select="$idx-1"/>
        </xsl:apply-templates>
      </result_metroavail>
    </xsl:otherwise>
  </xsl:choose>
</xsl:template>
```

21/22

FIG. 30

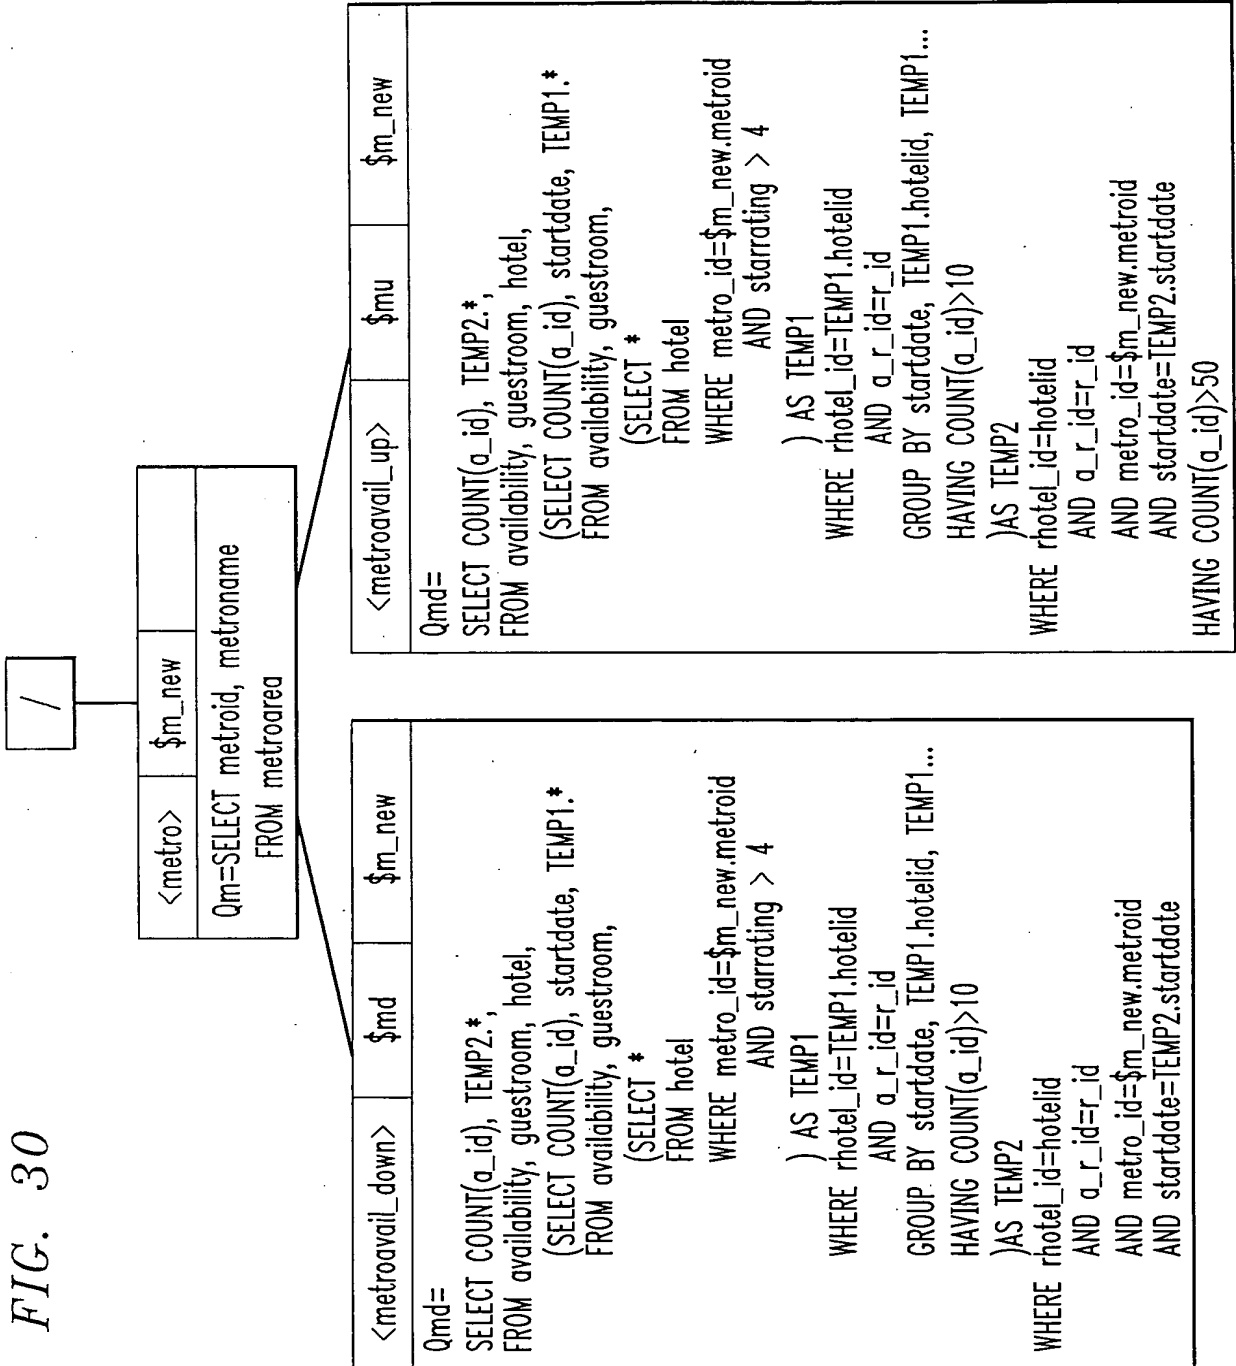


FIG. 31

```
<xsl:template match="/metro"> (R1')
  <xsl:param name="idx" select="10"/>
  <result_metro>
    <xsl:apply-templates
      select="metroavail_down[@count<$idx]">
      <xsl:with-param name="idx"
        select="$idx"/>
    </xsl:apply-templates>
  </result_metro>
</xsl:template>

<xsl:template match="metroavail_down"> (R2')
  <xsl:param name="idx"/>
  <xsl:choose>
    <xsl:when test="$idx<=1">
      <xsl:value-of select="."/>
    </xsl:when>
    <xsl:otherwise>
      <result_metroavail>
        <xsl:apply-templates
          select="../metroavail_up">
          <xsl:with-param
            name="idx" select="$idx-1"/>
        </xsl:apply-templates>
      </result_metroavail>
    </xsl:otherwise>
  </xsl:choose>
</xsl:template>

<xsl:template match="metroavail_up"> (R3')
  <xsl:param name="idx"/>
  <result_metro>
    <xsl:apply-templates
      select="../metroavail_down[@count<$idx]">
      <xsl:with-param
        name="idx" select="$idx"/>
    </xsl:apply-templates>
  </result_metro>
</xsl:template>
```